


NA
STANDARD
NO.


ALCOA
DIE
NO.

BASIC
DIMENSIONSSUBSTITUTE
FORMED SECTIONS

1E8T 30660




Area: .266 sq. in.




Al. Alloy 24S0 clad
.156 x 1.88 x L Sheet
Area: .321 sq. in.

1E38T 30006

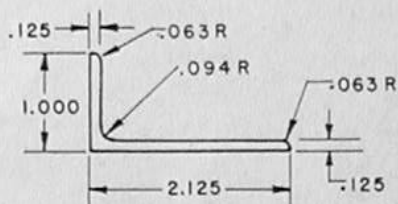


Area: .375 sq. in.

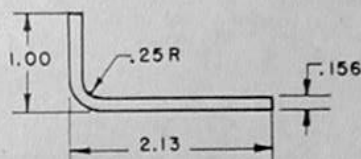


Al. Alloy 24S0 clad
.156 x 2.82 x L Sheet
Area: .440 sq. in.

1E87T 16869




Area: .187 sq. in.




Al. Alloy 24S0 clad
.125 x 1.637 x L Sheet
Area: .204 sq. in.

1E101T 14653



Area: .092 sq. in.



Al. Alloy 24S0 clad
.102 x 1.301 x L Sheet
Area: .133 sq. in.

NOTE: Heat-treat Al. Alloy 24S0
to 24ST after forming.
All repair material to
conform to specification
AN-A-13.

FIGURE 8-1. EXTRUSION EQUIVALENTS (sheet 1 of 5 sheets)