

7. Install the 145-58803-24 line assembly from the relief valve to the regulator.

8. Install the 145-58803-26 line assembly from the relief valve to the tee on the side of the reservoir.

9. Remove the 145-51031-30 sump assembly from the union on the hydraulic pressure line just aft of the firewall. Install the 145-38801-58 line from the hydraulic regulator to the union.

10. Remove the coverplate on the hydraulic pump drive at right-hand side of engine accessory section, and install 145-58189 adapter, hydraulic pump, and lines.

11. Connect the hydraulic pump pressure hose to the lower fitting on the new relief valve.

12. Connect the hydraulic pump suction hose to the lower fitting on the regulator.

See Figure 2

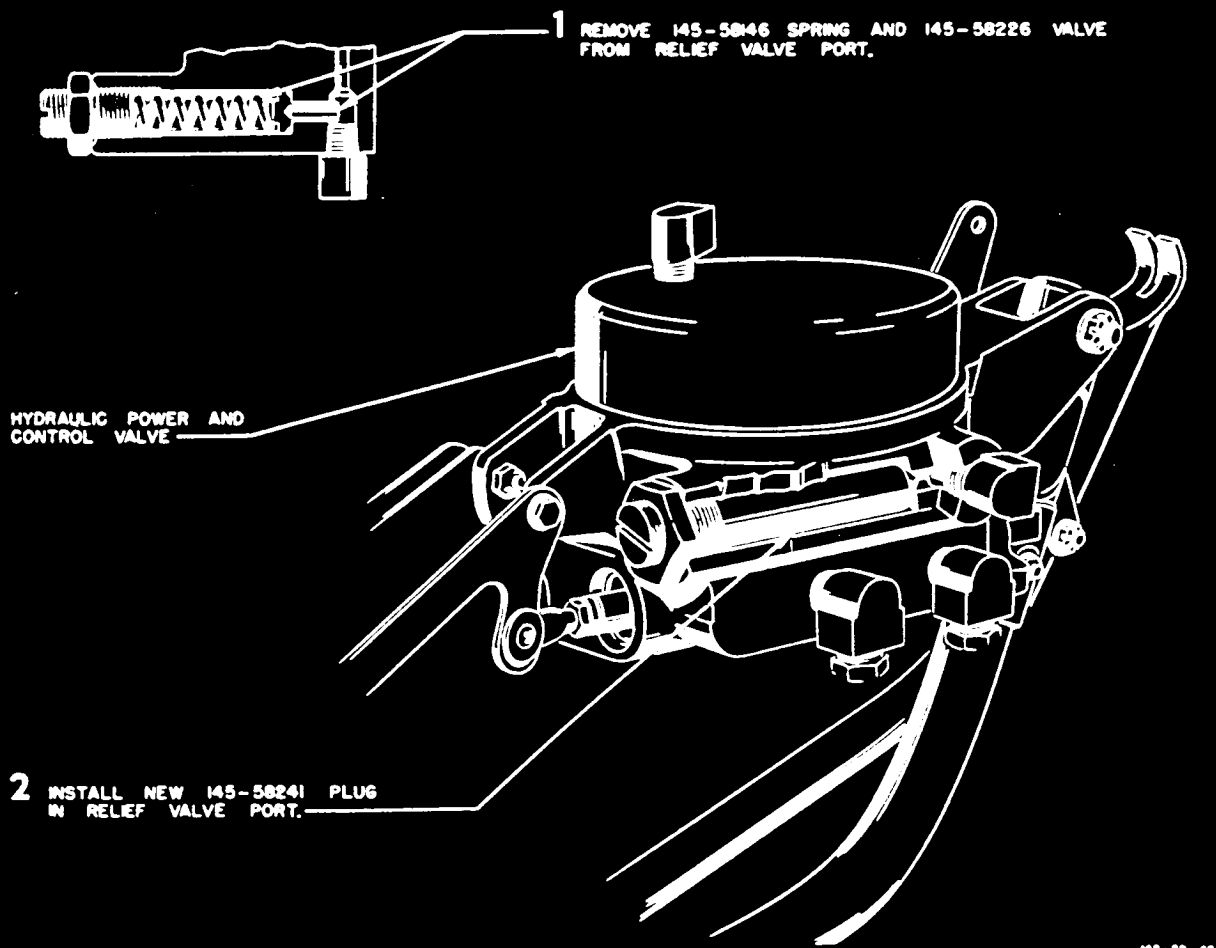


Figure 2 - Rework of Hydraulic Power and Control Unit